



DISMANTLING JOINT RIGID TYPE FLANGED DRILLED TO CLASS PN16.

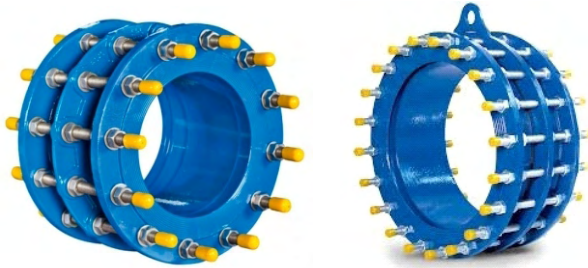

NO	PART NAME	MATERIAL
1	PIPE	DUCTILE IRON GGG400-10
2	BODY	DUCTILE IRON GGG400-10
3	RETAINER	DUCTILE IRON GGG400-10
4	RING	EPDM/NBR
5	STUD	STEEL ZINCED/DACRO

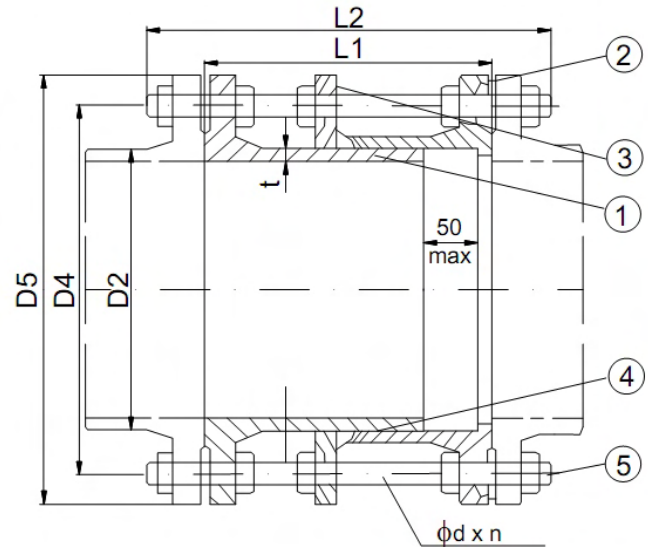

DIMENSIONS.

DISMANTLING JOINT									
DN	D2	D4	D5	L1	L2	Ød	N	t	W(kg) PN16
50	62	125	165	180	320	19	4	6.0	18
65	78	145	185	180	320	19	4	6.0	20
80	98	160	200	200	340	19	8	7.0	24.7
100	118	180	220	200	340	19	8	7.5	28.6
125	144	210	250	200	340	19	8	7.5	35.1
150	170	240	285	200	340	23	8	8.0	46.8
200	222	295	340	220	350	23	12	8.5	68.9
250	274	355	400	230	380	28	12	9.0	101.4
300	326	410	455	230	400	28	12	10.0	122.2
350	378	470	520	250	410	28	16	10.5	169.0
400	429	525	580	250	430	31	16	11.0	210.6
450	480	585	640	270	450	31	20	11.5	247.0
500	532	650	715	280	460	34	20	12.0	312.0
600	635	770	840	300	500	37	20	13.5	435.5
700	738	840	910	300	500	37	24	14.5	555.0
800	842	950	1025	320	530	40	24	16.0	720.0
900	945	1050	1125	320	530	40	28	17.0	825.0
1000	1048	1170	1255	340	570	43	28	18.0	1080.0
1100	1152	1270	1355	350	570	43	32	19.5	1230.0
1200	1255	1390	1485	370	620	49	32	20.5	1665.0
1400	1462	1590	1685	380	680	49	36	23.0	2040.0
1500	1565	1710	1820	410	700	56	36	24.0	-
1600	1668	1820	1930	410	750	56	40	25.5	2904.0
1800	1875	2020	2130	440	750	56	44	28.0	3690.0
2000	2082	2230	2345	460	750	62	48	30.0	-