


UNIVERSAL COUPLING (WIDE RANGE). PN 10/16



NO	REFERENCE	MATERIAL	STANDARD
1	SLEEVE	STEEL / DUCTILE IRON	
2	END RING	DUCTILE IRON GGG400-10	EN1563
3	BOLT AND NUT	STEEL 8.8 ZINCED/DACRO	
4	GASKET	EPDM/NBR	EN681
5	COATING	FBE/RILSAN	EN14901

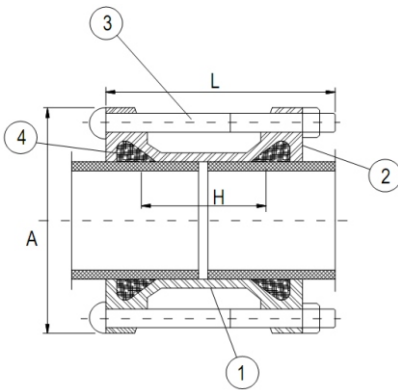

DIMENSIONS.

UNIVERSAL COUPLING												
PIPE	RANGE	BOLT		A	H	WEIGHT	Pipe to fit					
NORM		L	Q'TY	MM	MM	KGS	DI	ST	PVC	AC	CI	GRP
DN40	48-60	M12 x 170	2	160	98	2.4	★	✳				+
DN50	59-72	M12 x 170	2	165	98	2.5	★	✳	◆	○		+
DN66	72-85	M12 x 170	2	185	98	3.2	★	✳			○	+
DN80	88-103	M12 x 180	4	185	103	4.1	●	★	✳	◆	○	+
DN100	109-128	M12 x 170	4	218	103	4.8	●	★	✳	◆	○	+
DN125	132-146	M12 x 180	4	250	103	6.3	★					+
DN125	138-153	M12 x 180	4	260	103	6.8	★	✳			○	+
DN150	159-182	M12 x 190	4	272	103	7.2	●	★	✳	◆	○	+
DN175	192-210	M12 x 190	4	312	130	11.0	★	✳			○	
DN200	218-235	M12 x 210	4	335	130	12.5	●	★	✳	◆	○	+
DN225	242-262	M12 x 210	6	350	130	14.5	★	✳	◆	○		
DN250	250-267	M12 x 220	6	380	130	15.0			✳	◆	○	
DN250	272-289	M12 x 220	6	405	130	16.0	●	★	✳	◆	○	+
DN300	315-332	M12 x 220	8	430	130	17.0	●	★	✳			+
DN300	322-339	M12 x 220	6	435	130	18.0	●	★		◆	○	+
DN350	340-360	M12 x 220	6	455	130	22.0	★	✳	◆	○		
DN350	351-378	M14 x 250	8	490	130	31.9	●	★	✳	◆		+
DN350	374-391	M14 x 250	8	510	130	33.0	●			◆		
DN400	390-410	M14 x 250	8	530	130	35.0	★	✳	◆			
DN400	410-436	M14 x 250	8	570	130	38.5	●			◆	○	+
DN400	417-437	M14 x 250	8	580	130	39.6	●			◆	○	+
DN400	425-442	M14 x 250	8	590	130	39.6	●				○	+
DN400	436-462	M14 x 250	8	600	130	40.7	★	✳	◆	○		
DN450	454-463	M14 x 250	10	600	130	45.1	★	✳	◆			
DN450	476-500	M14 x 250	10	640	130	47.3	●		✳	◆	○	
DN500	500-508	M14 x 250	10	650	130	47.3	★	✳	◆	○		
DN500	526-546	M14 x 250	10	690	130	53.9	●			◆	○	+
DN500	560-570	M14 x 250	10	720	130	55.0	★	✳	◆	○		
DN500	580-590	M14 x 250	10	740	130	55.0				◆	○	
DN600	600-630	M14 x 250	10	790	130	71.5	★	✳	◆	○		
DN600	630-650	M14 x 250	10	800	130	57.2	●		✳		○	
DN650	662-679	M14 x 250	10	840	130	77.0	★			◆	○	
DN800	800-816	M16 x 280	12	960	130	120.0	★	✳	◆			

