

**LEADING THE FIGHT AGAINST FIRE**



**SPECIFICATION**

**ISO 9001:2000**

Body : Copper Alloy to BS 1400  
Handwheel : Grey Cast Iron to BS 1452  
Inlet : Flanged or BSP screw thread  
Outlet : Female instantaneous to BS 336 and other connections  
Pressure Test : 22.5 bar  
Manufacture and certified to BS 5041 Part 1\*  
Nominal size: DN50 2" ; DN65 2.1/2" ; DN80 3".

**ANGLE VALVE**




**LEADING THE FIGHT AGAINST FIRE**



**SPECIFICATION**

**ISO 9001:2000**

Body : Copper Alloy to BS 1400  
 Handwheel : Grey Cast Iron to BS 1452  
 Inlet : Flanged or BSP screw thread  
 Outlet : Female instantaneous to BS 336 and other connections  
 Pressure Test : 22.5 bar  
 Manufacture and certified to BS 5041 Part 1\*  
 Nominal size: DN50 2" ; DN65 2.1/2" ; DN80 3".

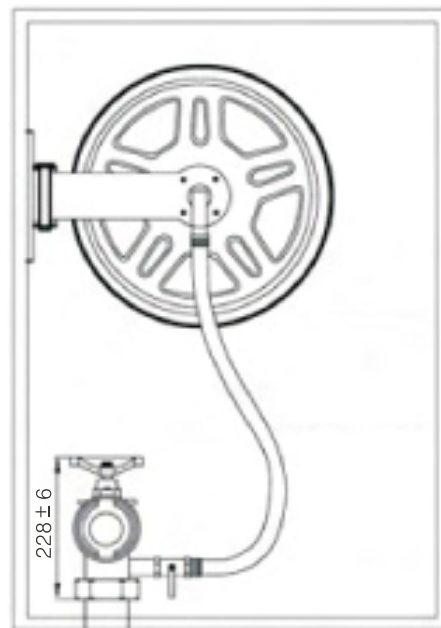

**LEADING THE FIGHT AGAINST FIRE**

**ISO 9001:2000**



**SPECIFICATION**

Body : Copper Alloy to BS 1400  
Handwheel : Grey Cast Iron to BS 1452  
Inlet : Flanged or BSP screw thread  
Outlet : Female instantaneous to BS 336 and other connections  
Pressure Test : 22.5 bar  
Manufacture and certified to BS 5041 Part 1\*  
Nominal size: DN50 2" ; DN65 2.1/2" ; DN80 3".



**LEADING THE FIGHT AGAINST FIRE  
LEADING THE FIGHT AGAINST FIRE**



**SPECIFICATION**

**ISO 9001:2000**

Body : Copper Alloy to BS 1400  
Handwheel : Grey Cast Iron to BS 1452  
Inlet : Flanged or BSP screw thread  
Outlet : Female instantaneous to BS 336 and other connections  
Pressure Test : 22.5 bar  
Manufacture and certified to BS 5041 Part 1\*  
Nominal size: DN50 2" ; DN65 2.1/2" ; DN80 3".

